
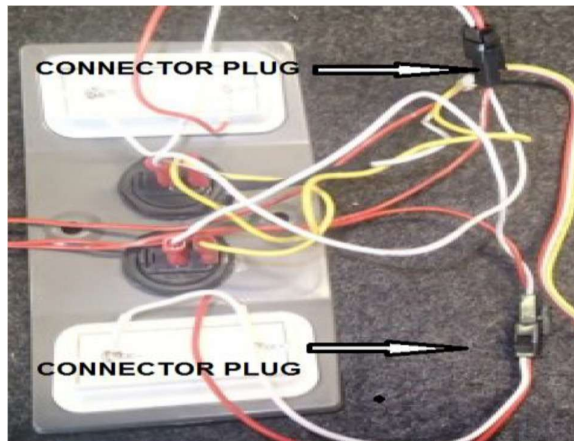


ROOF CONSOLE L.E.D. LIGHT ASSEMBLY REPLACEMENT

- Remove the 2 screws holding front and/or rear light assemblies to console body, and gently pull assembly away from console body to expose wiring and back of LED chips.
- Remove small screws holding wires from console loom to LED chip, or unclip black connector plugs (if Fitted).
- Carefully pull female terminal plugs on white and yellow wires from back of light switches.

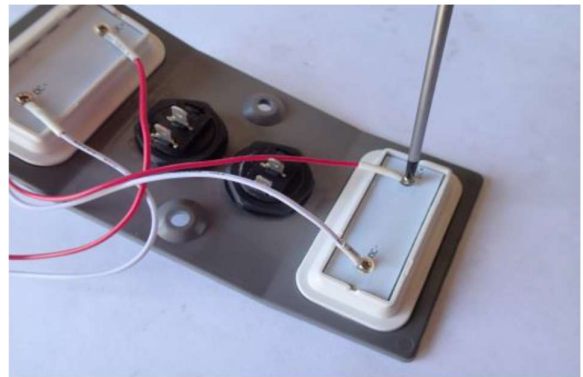

- Hold new light assembly up next to console loom and push white wire female plug to 'O' on switch terminal and push yellow wire female plug to 'I' on switch terminal.
- Plug LED chip wire connector plugs to loom (if fitted) or screw red wire eyelets to + on LED chip and white eyelets to - on LED chip.
- Check light switches operate correctly.
- Screw light assembly back into console body.